



SC-UR0124M is the 1 channel active type UTP video receiver with high performance interference immunity function. It transmits video signal up to 1.8km in color and 2.4km in B/W via UTP cable. Also it supports RS-485 interface for PTZ control.

## | Features

- Active type of UTP receiver with excellent interference immunity
- Video transmission up to 2.4km (B/W) and up to 1.8km (color) in high mode
- Distance level switch (Low: under 600m, High: 600~2.4km)
- Optimum video quality setting by the sync & burst adjustment (A. Level / F. Level)
- Possible to use the camera adaptor when connecting the adaptors in parallel (with power consumption under 30mA).
- Minimum influence of noises from the transmission lines
- Easy to install inside the camera housing.
- Surge Protection function


[ SC-UR0124M ]



## | Specifications

MODEL	SC-UR0124M(Rx.)	
Video IN	51Ω 1Vp-p ~ 2.5Vp-p	
Video OUT	CVBS 1.0Vp-p, 75Ω	
Power Consumption	30mA	
Power	Input	With adaptor, DC 12V 500mA / AC 24V 300mA
	Output	Loop Through
Bandwidth	1.5km:6MHz	
Max. Distance (CAT.5)	Low: under 600m, High: 600~2.4km	
Video Level Control	VR (A. Level / F. Level), select between H/L	
Connect Port	Video IN	RJ-45
	Video OUT	BNC-M Harness(45cm)
	Data / Power	4P Terminal Block(1~2: DATA /3~4: POWER)
Temperature / Humidity	-10°C ~ +50°C / 0 ~ 80%	
Case body / Weight	Aluminum / 120g	
Dimension(mm)	77(W) x 60(H) x 25(D)	

## | Connection Diagram

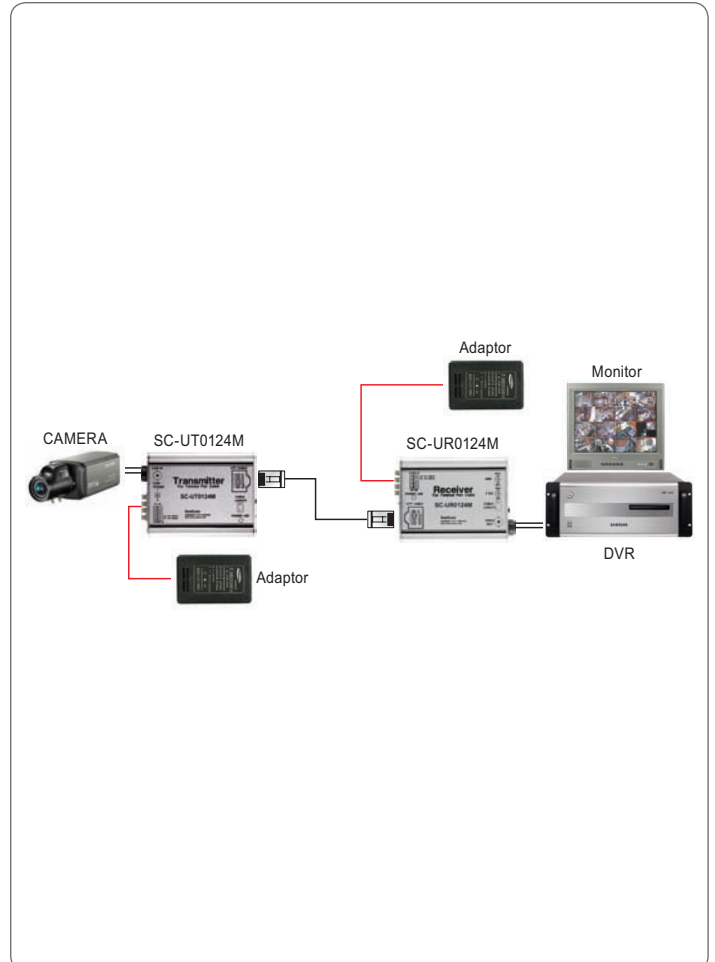

## | Dimensions

